



METRIC Threads cartridge single-acting flow control valves

FT 2267/5


Single-acting flow control valves available from 1/4" to 1" size - METRIC THREADS. Max. working pressure 320 Bar, adjustable oil flow rate from 0,8 to 200 Lt./min. (depending on the size)

Single-acting control

No pressure compensated flow control

METRIC threads

Stainless Steel AISI 316

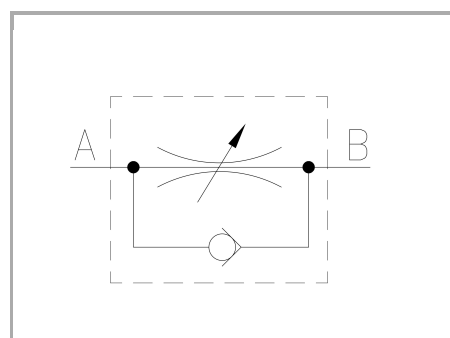

Technical information

Technical description

They control and, in case, shut-off the flow in one direction and allow the full free flow in the opposite direction. • Check valve calibrated at 0,35 bar

Materials

CORPO VALVOLA / VALVE BODY	Acciaio INOX / Stainless Steel AISI 316
SPILO DI REGOLAZIONE / ADJUSTING NEEDLE	Acciaio INOX / Stainless Steel AISI 630
GUARNIZIONI / GASKETS	FPM
ANELLI ANTIESTRUSIONE / ANTIEXTRUSION RINGS	PTFE
VALVOLA RITEGNO / CHECK VALVE	Acciaio INOX / Stainless Steel AISI 316
MOLLA / SPRING	Acciaio INOX / Stainless Steel AISI 316
MANOPOLA TIPO MA - RA / KNOB TYPE MA - RA	Alluminio/Aluminum GD AISi12- UNI EN AB 46100
MANOPOLA TIPO MP / KNOB TYPE MP	ABS





Technical data


TIPO / TYPE	PRESSIONE ESERCIZIO BAR / WORKING PRESSURE BAR	MIN. PRESSIONE SCOPPIO BAR / MIN. BURSTING PRESSURE BAR	TEMPERATURA ESERCIZIO / WORKING TEMPERATURE	GRADO DI FILTRAZIONE µm / FILTRATION GRADE µm
14	320	1300	-20°C/+130°C	25
38	320	1300	-20°C/+130°C	25
12	320	1300	-20°C/+130°C	25
34	320	1300	-20°C/+130°C	25
100	320	1300	-20°C/+130°C	25

Dimensional tables and drawings

TIPO / TYPE	ØA UNI 4534	ØB	C	D	E	ØF
14	M20x1,5	16	11,5	19	30,5	27
38	M27x2	19	14	26	40,0	33
12	M33x2	27	17	27,5	44,5	38
34	M42x2	35	19,5	33	52,5	47
100	M52x2	45	22,5	42	64,5	58


TIPO / TYPE	ØF1	G	H	L	CH	PESO / WEIGHT KG
14	50	43	73,5	4	27	0,130
38	49	52,5	92,5	6	32	0,250
12	60	60	104,5	7	41	0,340
34	70	69,5	122	8	50	0,620
100	120	85	149,5	12	60	1,632

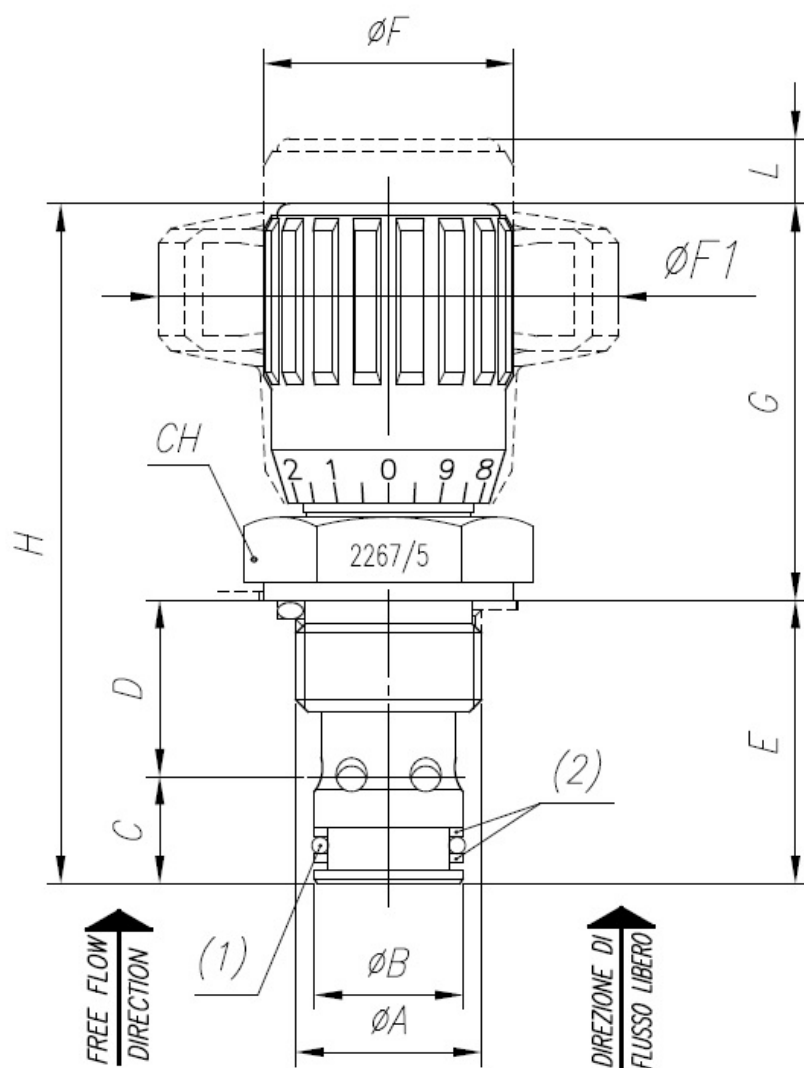




SEALING DONE WITH OR GASKETS ON FLAT SEATING

F.lli Tognella S.p.A. - Via Goito, 60 - 21019 Somma Lombardo (VA) - (+39) 0331 988 411 | P.I. 00185410123 | www.tognella.it



TENUTA REALIZZATA CON BONDED SEAL
SEALING DONE WITH BONDED SEALS

	øA	C	D UNI 4534	E	E1	F	øG	H	øL	M	Sm	BONDED SEAL
14	27	1	M20x1.5	20	19.5	12	16	32	8	15.2	1	400-513
38	33	1.3	M27x2	28	26.5	18	19	41	10	22	1.2	400-520
12	40	1.3	M33x2	30.5	30	18	27	45.5	12	23	1.2	400-515
34	50	1.3	M42x2	36.5	35	21.5	35	55	16	28.5	1.5	400-516

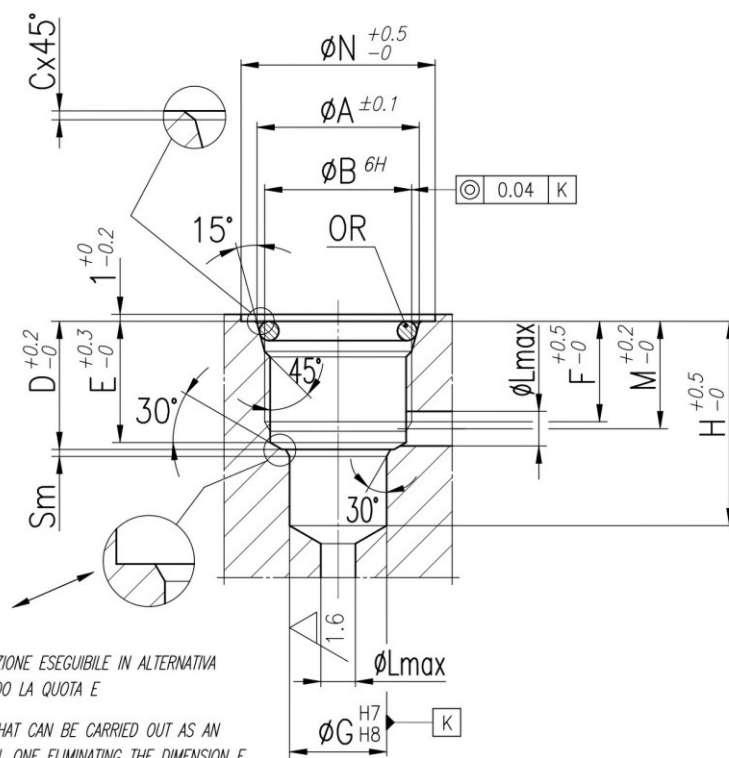


-PARTICOLARE DELLA LAVORAZIONE ESEGUIBILE IN ALTERNATIVA
A QUELLA CONICA ELIMINANDO LA QUOTA E

-DETAIL OF THE MACHINING THAT CAN BE CARRIED OUT AS AN
ALTERNATIVE TO THE CONICAL ONE ELIMINATING THE DIMENSION E


TENUTA REALIZZATA CON GUARNIZIONI OR SU SEDE CONICA
SEALING DONE WITH OR GASKETS ON CONICAL SEATING

	ϕA	ϕB UNI 4534	C	D	E	F	ϕG	H	ϕL	M	ϕN	Sm	OR
14	22.3	M20x1.5	0.25	21	20.5	13.5	16	33.5	8	16.2	28	1.2	3068
38	29.1	M27x2	0.3	30	28.5	20	19	43	10	24	34	1.2	132
12	36	M33x2	0.3	32.5	32	20	27	47.5	13	25	43	1.2	4112
34	45	M42x2	0.3	38.5	37	23.5	35	57	16	29	60	1.5	4150
100	55	M52x2	0.3	46	45	27	45	67.5	20	34.5	61	1.5	4187




Flow rate curves


FT 2267/5 - PORTATA FLUSSO LIBERO / FREE FLOW

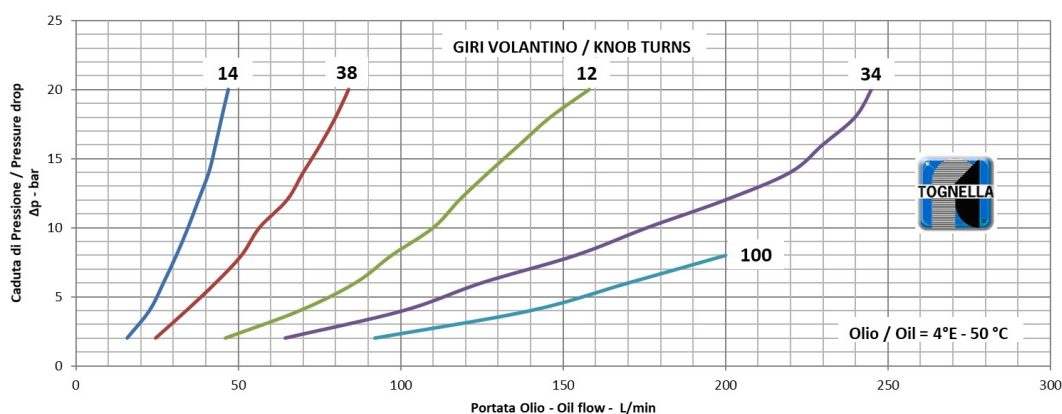


FT 2267/5 - 14

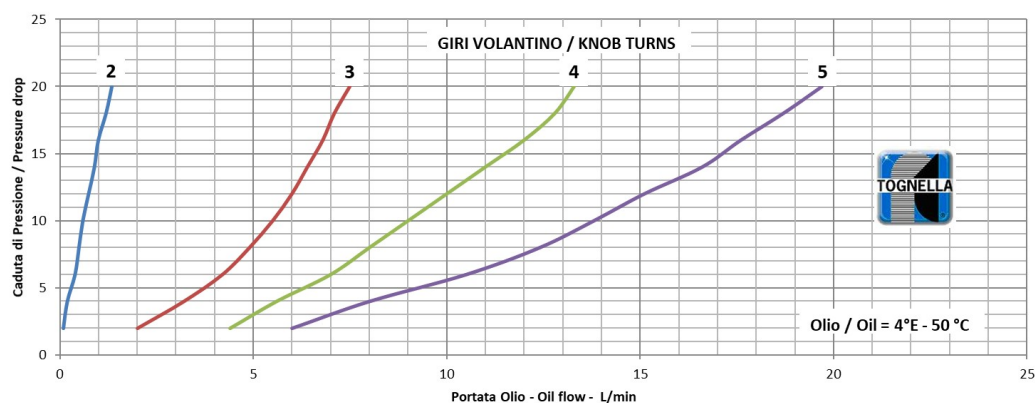


FT 2267/5 - 38

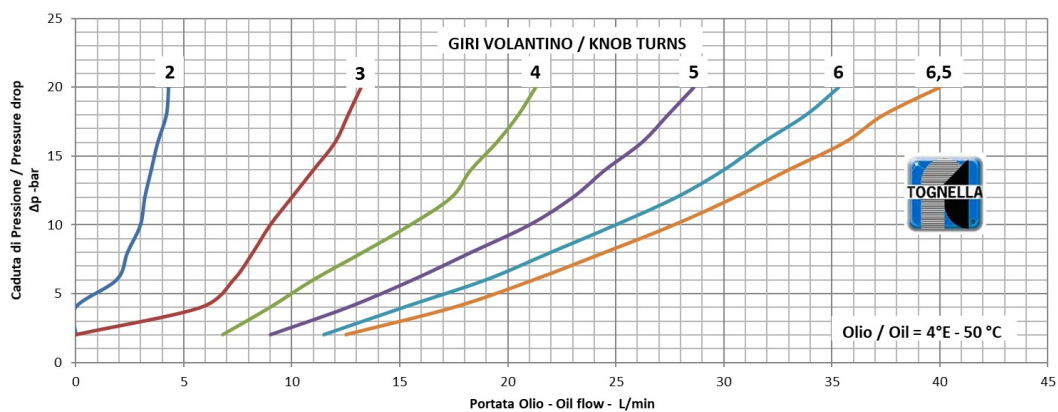




FT 2267/5 - 12

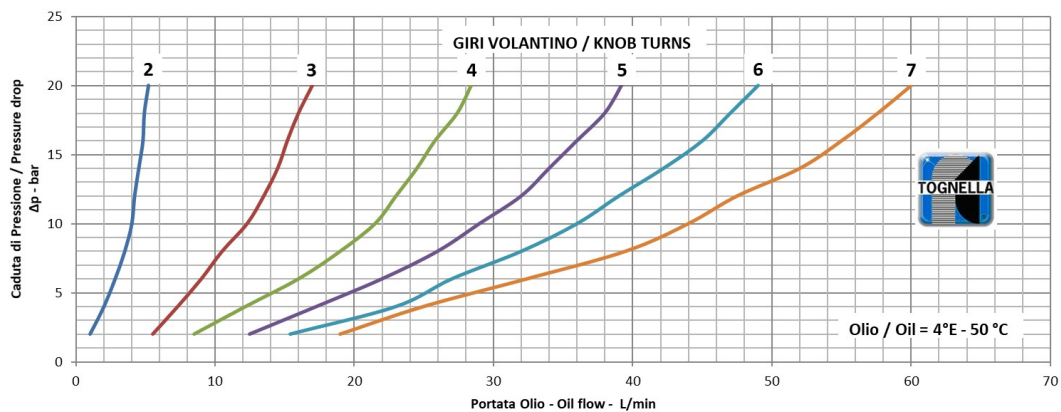

FT 2267/5 - 34

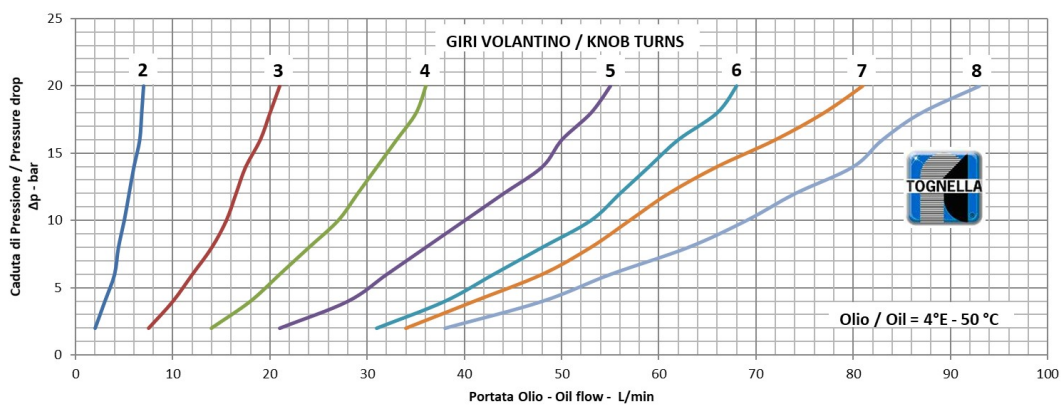

FT 2267/5 - 100

